

DISCLAIMER

GENERAL SPECIFICATIONS

- GE is not responsible for the installation of developers and associated equipment, lighting, cassette trays and protective screens or derivatives not mentioned in the order.
- The final study contains recommendations for the location of GE equipment and associated devices, electrical wiring and room arrangements. When preparing the study, every effort has been made to consider every aspect of the actual equipment expected to be installed.
- The layout of the equipment offered by GE, the dimensions given for the premises, the details provided for the pre-installation work and electrical power supply are given according to the information noted during on-site study and the wishes expressed by the customer.
- The room dimensions used to create the equipment layout may originate from a previous layout and may not be accurate as they may not have been verified on site. GE cannot take any responsibility for errors due to lack of information.
- Dimensions apply to finished surfaces of the room.
- Actual configuration may differ from options presented in some typical views or tables.
- If this set of final drawings has been approved by the customer, any subsequent modification of the site must be subject to further investigation by GE about the feasibility of installing the equipment. Any reservations must be noted.
- The equipment layout indicates the placement and interconnection of the indicated equipment components. There may be local requirements that could impact the placement of these components. It remains the customer's responsibility to ensure that the site and final equipment placement complies with all applicable local requirements.
- All work required to install GE equipment must be carried out in compliance with the building regulations and the safety standards of legal force in the country concerned.
- These drawings are not to be used for actual construction purposes. The company cannot take responsibility for any damage resulting therefrom.

CUSTOMER RESPONSIBILITIES

- It is the responsibility of the customer to prepare the site in accordance with the specifications stated in the final study. A detailed site readiness checklist is provided by GE. It is the responsibility of the customer to ensure all requirements are fulfilled and that the site conforms to all specifications defined in the checklist and final study. The GE Project Manager of Installation (PMI) will work in cooperation with the customer to follow up and ensure that actions in the checklist are complete, and if necessary, will aid in the rescheduling of the delivery and installation date.
- Prior to installation, a structural engineer of record must ensure that the floor and ceiling is designed in such a way that the loads of the installed system can be securely borne and transferred. The layout of additional structural elements, dimensioning and the selection of appropriate installation methods are the sole responsibility of the structural engineer. Execution of load bearing structures supporting equipment on the ceiling, floor or walls are the customer's responsibility.

RADIO-PROTECTION

- Suitable radiological protection must be determined by a qualified radiological physicist in conformation with local regulations. GE does not take responsibility for the specification or provision of radio-protection.

| | | |
|--|-------------|------------------|
| THE UNDERSIGNED, HEREBY CERTIFIES THAT I HAVE READ AND APPROVED THE PLANS IN THIS DOCUMENT. | | |
| DATE | NAME | SIGNATURE |
| | | |

CUSTOMER SITE READINESS REQUIREMENTS

| REQUIRED MANUALS FOR SYSTEM PRE-INSTALLATION | |
|---|-------------------------|
| Description | Document Number* |
| Product specific Pre-installation Manual | Refer to cover page |
| *documents can be accessed in multiple languages at https://www.gehealthcare.com/support/manuals | |

- A mandatory component of this drawing set is the GE HealthCare Pre-installation manual. Failure to reference the Pre-installation manual will result in incomplete documentation required for site design and preparation.
- The items on the GE HealthCare Site Readiness Checklist **DOC2949061** and Worksheet **DOC2949068** are **REQUIRED** to facilitate equipment delivery to the site. Equipment will not be delivered if these requirements are not satisfied.
 - Any deviation from these drawings must be communicated in writing to and reviewed by your local GE HealthCare installation project manager prior to making changes.
 - Make arrangements for any rigging, special handling, or facility modifications that must be made to deliver the equipment to the installation site. If desired, your local GE HealthCare installation project manager can supply a reference list of rigging contractors.
 - New construction requires the following;
 1. Secure area for equipment,
 2. Power for drills and other test equipment,
 3. Restrooms.
 - Provide for refuse removal and disposal (e.g. crates, cartons, packing)
 - It is required to minimize vibrations within the scan room. It is the customer's responsibility to contract a vibration consultant/engineer to implement site design modifications to meet the GE vibration specification. Refer to the system Pre-installation manual for vibration specifications.

ENVIRONMENT

MAGNETIC FIELD SPECIFICATIONS

In order to avoid interference on the system, the static field limits from the surrounding environment must be less than 1 Gauss in both the scan and the operator rooms.

In order to avoid interference on the system, static field limits from the surrounding environment are specified below.

- Static field must be less than 1 Gauss in Examination room, and in the Control Area.
- Static field must be less than 3 Gauss in the Technical Room.

ELECTROSTATIC DISCHARGE ENVIRONMENT & RECOMMENDATIONS

In order to reduce electrostatic discharge interference, install a charge dissipative floor material to avoid electrostatic charge buildup.

The relative humidity shall be at least 30 percent.

The dissipative material shall be connected to the system ground reference, if applicable.

EMC COMPLIANCE

This system complies with IEC60601-1-2 (2007-03) EMC standard for medical electrical equipment.

RADIOACTIVE ISOTOPES

USING RADIOACTIVE ISOTOPES


Since this equipment involves the use of radioactive isotopes, compliance with Nuclear Regulatory Commission regulations, or similar regulatory requirements (depending on the country), must be adhered to.

In most situations, this must be done prior to acquiring any source materials. This includes calibration sources which may have fairly long delivery lead times. These calibration sources may also have a short half life, and it may not be advisable to store them over long periods of time.

Regulatory compliance should be arranged early in the site planning process.

RADIOACTIVE ISOTOPES FOR SYSTEM CALIBRATION

A Co57 Square Flood Source for QC and Maps creation, with an activity of 20 mCi, must be pre-ordered and available on site before installation commences.

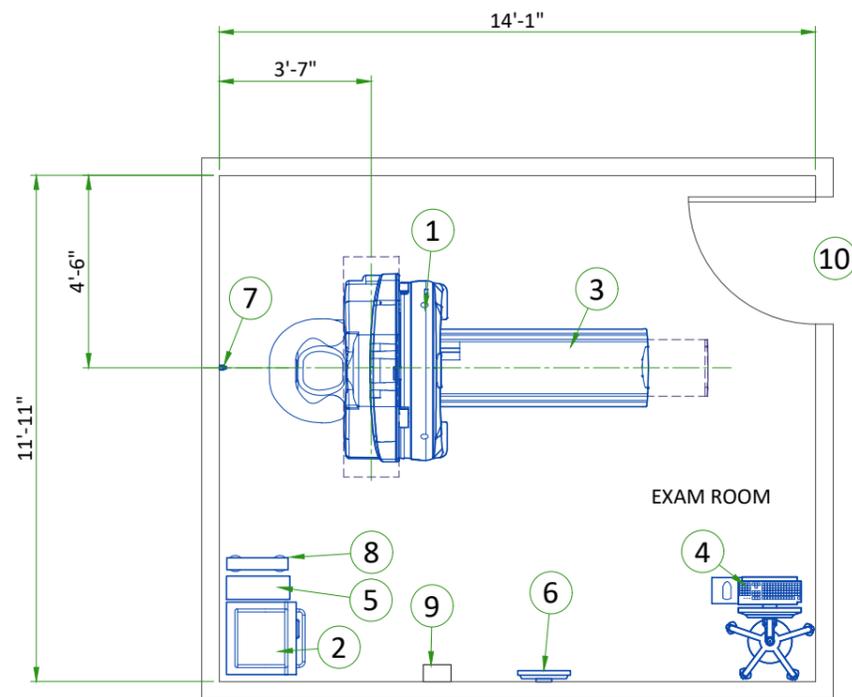

LEGEND

| | | | |
|---|--|---|--|
| A | GE SUPPLIED | D | AVAILABLE FROM GE |
| B | GE SUPPLIED/CONTRACTOR INSTALLED | E | EQUIPMENT EXISTING IN ROOM |
| C | CUSTOMER/CONTRACTOR SUPPLIED AND INSTALLED | * | ITEM TO BE REINSTALLED FROM ANOTHER SITE |


| BY | ITEM | DESCRIPTION | MAX HEAT OUTPUT (BTU/h) | WEIGHT (lbs) | MAX HEAT OUTPUT (W) | WEIGHT (kg) |
|----|------|---|-------------------------|--------------|---------------------|-------------|
| A | 1 | GANTRY WITH DETECTORS | 2150 | 1433 | 630 | 650 |
| A | 2 | IPS (INTEGRATED POWER SUPPLY) | 205 | 172 | 60 | 78 |
| A | 3 | PATIENT TABLE | 512 | 573 | 150 | 260 |
| A | 4 | MOBILE CONSOLE (AC2) | 273 | 33 | 80 | 15 |
| A | 5 | ACQUISITION STATION (AS) | 512 | 99 | 150 | 45 |
| A | 6 | PATIENT POSITION MONITOR | - | - | - | - |
| A | 7 | PATIENT CAMERA | - | - | - | - |
| A | 8 | UPS 3kVA | - | 75 | - | 34 |
| D | 9 | MAIN DISCONNECT PANEL | - | - | - | - |
| C | 10 | MINIMUM OPENING FOR EQUIPMENT DELIVERY IS 910 mm w x 2108 mm [36 in x 83 in] CONTINGENT ON A 1346 mm [53 in] CORRIDOR WIDTH | | | | |

EXAM ROOM HEIGHT


| | |
|-------------------------------|---------|
| FINISHED FLOOR TO SLAB HEIGHT | TBD |
| FALSE CEILING HEIGHT | 7'-4.5" |

For Accessory Sales: (866) 281-7545 Options 1, 2, 1, 2 or mail to: gehaccessoriesales@ge.com


GANTRY AND PATIENT TABLE

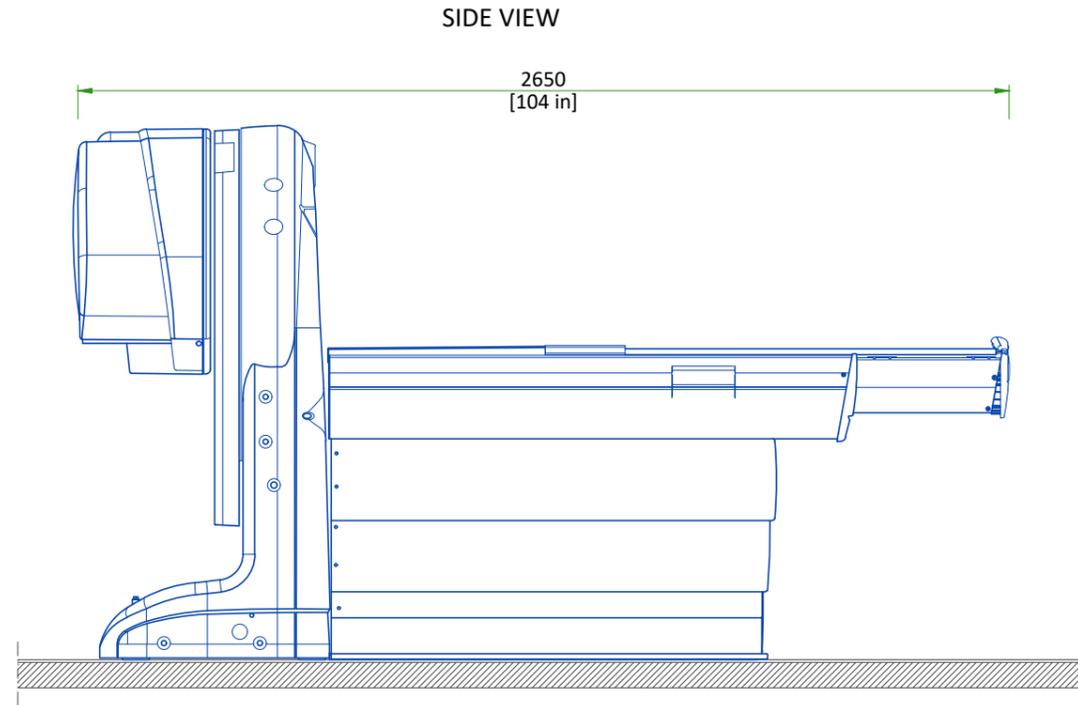


PATIENT TABLE

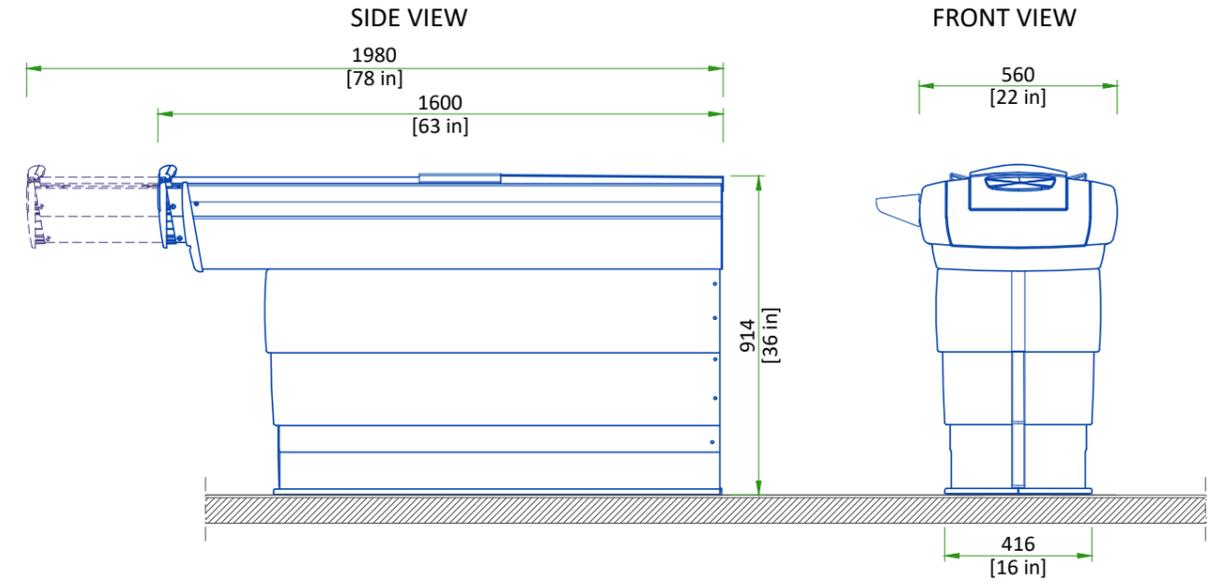

AQUISITION STATION ON CART (AC2)

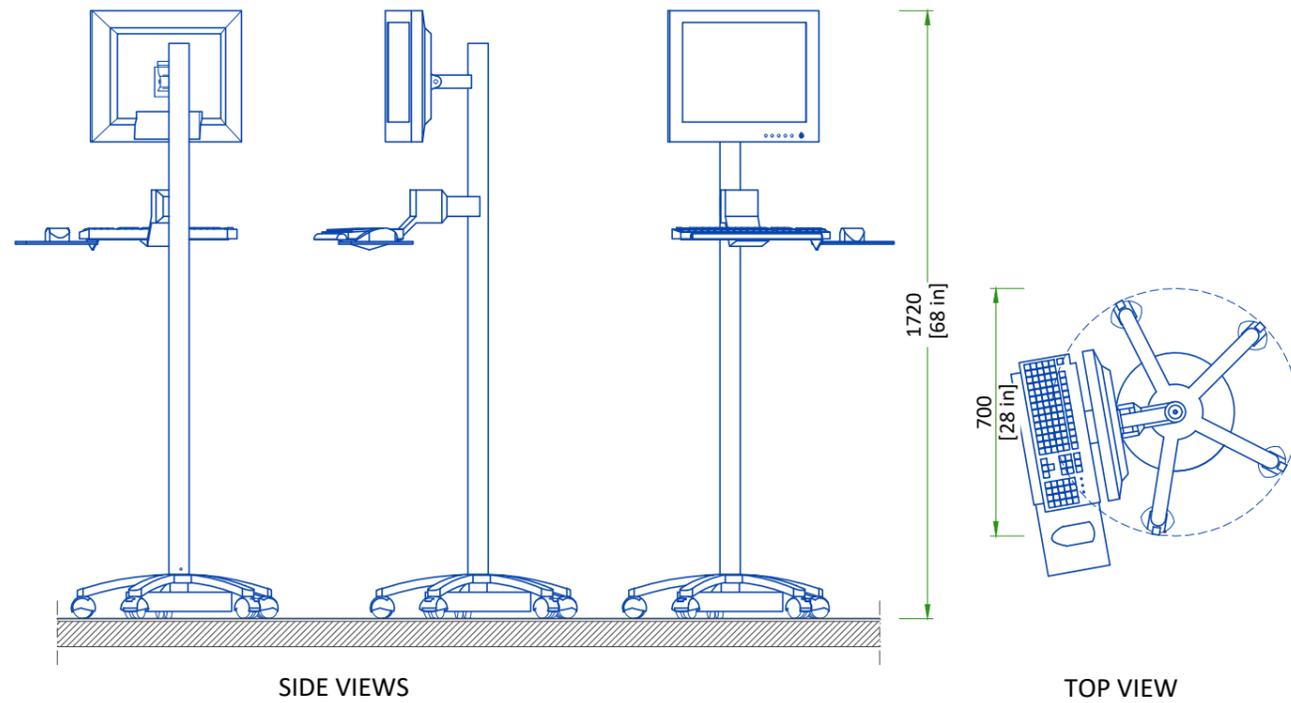

IPS

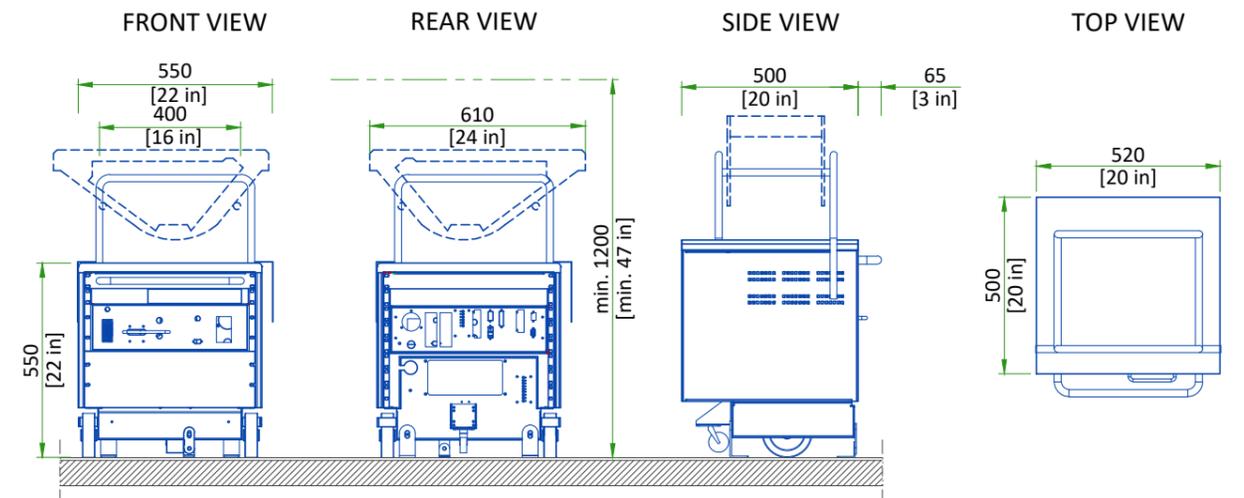

DELIVERY

THE CUSTOMER/CONTRACTOR SHOULD:


- Provide an area adjacent to the installation site for delivery and unloading of the GE equipment.
- Ensure that the dimensions of all doors, corridors, ceiling heights are sufficient to accommodate the movement of GE equipment from the delivery area into the definitive installation room.
- Ensure that access routes for equipment will accommodate the weights of the equipment and any transportation, lifting and rigging equipment.
- Ensure that all necessary arrangements for stopping and unloading on public or private property not belonging to the customer have been made.

UNPACKED COMPONENT DIMESIONS

| EQUIPMENT | DIMENSIONS | | WEIGHT |
|---|------------|------------------|------------------|
| GANTRY WITHOUT TRIPLETS | LENGTH | 735 mm [28.9 in] | 590 kg [1300 lb] |
| | WIDTH | 1350 mm [53 in] | |
| | HEIGHT | 1550 mm [61 in] | |
| GANTRY-FULL CONFIGURATION WITH TRIPLETS | LENGTH | 735 mm [28.9 in] | 650 kg [1433 lb] |
| | WIDTH | 1350 mm [53 in] | |
| | HEIGHT | 1550 mm [61 in] | |
| PATIENT TABLE | LENGTH | 1400 mm [55 in] | 260 kg [573 lb] |
| | WIDTH | 550 mm [21.6 in] | |
| | HEIGHT | 550 mm [21.6 in] | |


STRUCTURAL NOTES

- All units that are wall mounted or wall supported are to be provided with supports where necessary. Wall supports are to be supplied and installed by the customer or his contractors. See plan and detail sheets for suggested locations and mounting hole locations.
- Floor slabs on which equipment is to be installed must be flat and level to specifications.
- Dimensions are to finished surfaces of room.
- For seismic regions ensure supports span three members.
- Customers contractor must provide all penetrations in post tension floors.
- Customers contractor must provide and install any non-standard anchoring. Documents for standard anchoring methods are included with GE equipment drawings for geographic areas that require such documentation.
- Customers contractor must provide and install hardware for "through the floor" anchoring and/or any bracing under access floors. This contractor must also provide floor drilling that cannot be completed because of an obstruction encountered while drilling by the GE installer such as rebar etc.
- It is the customer's responsibility to perform any floor or wall penetrations that may be required. The customer is also responsible for ensuring that no subsurface utilities (e.g., electrical or any other form of wiring, conduits, piping, duct work or structural supports (i.e. post tension cables or rebar)) will interfere or come in contact with subsurface penetration operations (e.g. drilling and installation of anchors/screws) performed during the installation process. To ensure worker safety, GE installers will perform surface penetration operations only after the customer's validation and completion of the "GE surface penetration permit"

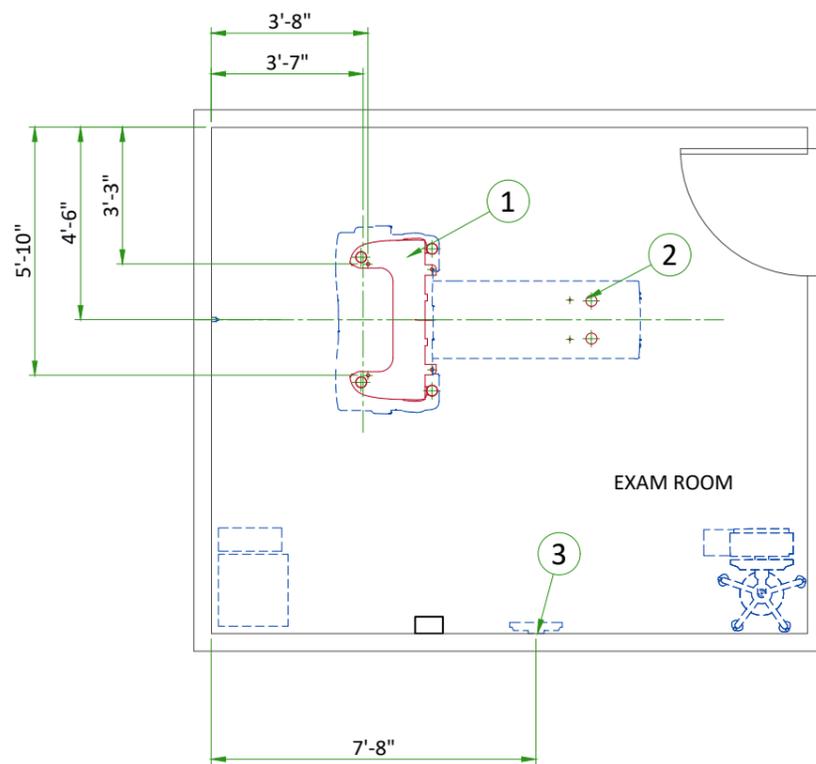

| ITEM | DESCRIPTION |
|-----------------------------------|---------------------------|
| 1 | Gantry floor contact area |
| 2 | Table floor contact area |
| (CONTRACTOR SUPPLIED & INSTALLED) | |
| 3 | Structural wall backing |

LOADING DISTRIBUTION TO THE FLOOR

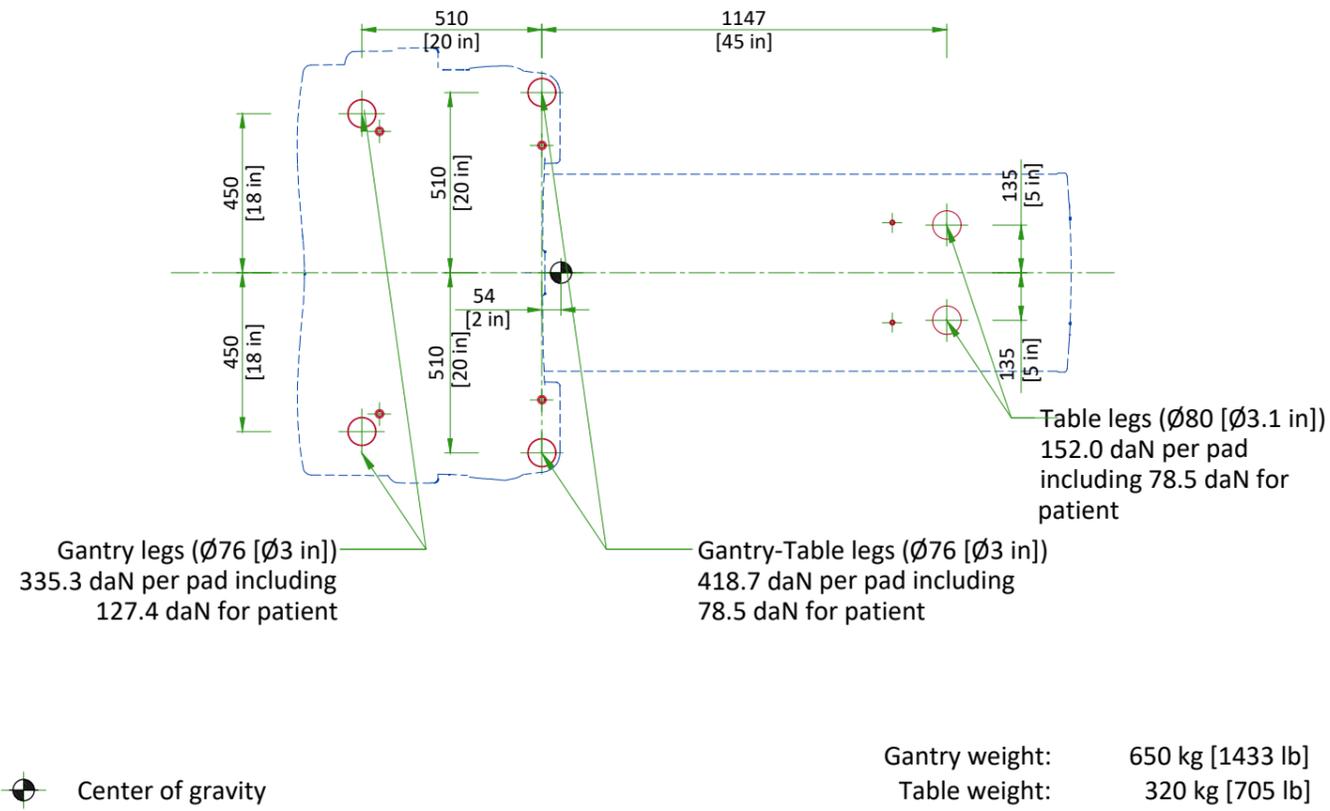

FLOOR SPECIFICATIONS

FLOOR LOADING

- The floor must be capable of supporting the weight of the equipment and accessories.
- When the floor does not meet level and flatness specifications, the floor will need to be corrected. The entire area of the installation room should be leveled.
- No fill material is allowed as a patch to compensate for surface deviations. Patches will eventually crack and pop out.

FLOOR LEVELING SPECIFICATIONS

| | |
|---------------|---|
| Slope | ± 30 mm [$\pm 1 \frac{3}{16}$ in] over 4300 mm [170 in] |
| Flatness | Surface should be smooth and have no more than 5 mm [$\frac{3}{16}$ in] deviation in any 1520 mm [60 in] throughout the room or system installation area |
| Floor surface | Floor should have one single poured surface |

TEMPERATURE AND HUMIDITY SPECIFICATIONS

IN-USE CONDITIONS

| | EXAM/CONTROL ROOM | |
|-----------------------|-----------------------|---------------|
| | Min | Max |
| Temperature | 18 °C [64 °F] | 25 °C [77 °F] |
| Temperature gradient | ≤ 3 °C/h [≤ 5.4 °F/h] | |
| Relative humidity (1) | 40% to 60% | |
| Humidity gradient | ≤ 5%/h | |

STORAGE CONDITIONS

| | System without Detector Triplets | Detector Triplets |
|-----------------------|----------------------------------|-------------------------------|
| Temperature | -20°C to +60°C [-4°F to 140°F] | +10°C to +30°C [50°F to 86°F] |
| Relative humidity (1) | 15% to 90% | |
| Humidity gradient | ≤ 5%/h | |
| Air pressure | 700 hPa to 1060 hPa | |

(1) non condensing

AIR RENEWAL

According to local standards.

NOTE

In case of using air conditioning systems that have a risk of water leakage it is recommended not to install it above electric equipment or to take measures to protect the equipment from dropping water.

HEAT DISSIPATION

| ROOM | DESCRIPTION | HEAT DISSIPATION (kW) | HEAT DISSIPATION (BTU/hr) |
|-----------|---------------------|-----------------------|---------------------------|
| | | MAX | MAX |
| Exam Room | Gantry | 0'-1" | 2150 |
| | Chiller | 0'-0" | 1020 |
| | Patient table | 0'-0" | 510 |
| | IPS | 0'-0" | 205 |
| | Acquisition station | 0'-0" | 510 |
| | Monitor | 0'-0" | 273 |
| | 2 kVA UPS (E4502K) | 0'-1" | 4436 |
| | TOTAL | 2.67 | 9104 |

CONNECTIVITY REQUIREMENTS

Your new GE Healthcare imaging modality will require local and remote connectivity to enable our full range of digital support:

- Local connectivity - This allows your system to connect to local devices such as PACS and modality worklist. We will require network information to configure the system(s), and a live ethernet port(s) prior to the delivery of the system(s).
- Remote connectivity - Your GE Healthcare service warranty includes InSite™ (applicable to InSite capable products), a powerful broadband-based service which enables digital tools that can help guard your hospital against equipment downtime and revenue loss by quickly connecting you to a GE Healthcare expert.

Depending on product family and software version, imaging systems can be connected in one of the following methods:


1. TLS over TCP Port 443 (Preferred method for new products) via:
 - a. DNS resolution
 - b. Customer-provided Proxy or
 - c. GE Proxy (Available in some regions)
2. Site-to-Site IPsec VPN tunnel

Please provide the GE project manager with the contact information for the resource that can provide information required to set up these connections. GEHC will send out communication to these contacts, which will include the project's Connectivity requirements, and a Connectivity form. This form will need to be completed and returned to GEHC prior to delivery of the system to ensure the system is tested and connectivity is enabled prior to the completion of the installation.

ELECTRICAL NOTES

1. All wires specified shall be copper stranded, flexible, thermo-plastic, color coded, cut 10 foot long at outlet boxes, duct termination points or stubbed conduit ends. All conductors, power, signal and ground, must be run in a conduit or duct system. Electrical contractor shall ring out and tag all wires at both ends. Wire runs must be continuous copper stranded and free from splices.
 - 1.1. Aluminum or solid wires are not allowed.
2. Wire sizes given are for use of equipment. Larger sizes may be required by local codes.
3. It is recommended that all wires be color coded, as required in accordance with national and local electrical codes.
4. Conduit sizes shall be verified by the architect, electrical engineer or contractor, in accordance with local or national codes.
5. Convenience outlets are not illustrated. Their number and location are to be specified by others. Locate at least one convenience outlet close to the system control, the power distribution unit and one on each wall of the procedure room. Use hospital approved outlet or equivalent.
6. General room illumination is not illustrated. Caution should be taken to avoid excessive heat from overhead spotlights. Damage can occur to ceiling mounting components and wiring if high wattage bulbs are used. Recommend low wattage bulbs no higher than 75 watts and use dimmer controls (except MR). Do not mount lights directly above areas where ceiling mounted accessories will be parked.
7. Routing of cable ductwork, conduits, etc., must run direct as possible otherwise may result in the need for greater than standard cable lengths (refer to the interconnection diagram for maximum usable lengths point to point).
8. Conduit turns to have large, sweeping bends with minimum radius in accordance with national and local electrical codes.
9. A special grounding system is required in all procedure rooms by some national and local codes. It is recommended in areas where patients might be examined or treated under present, future, or emergency conditions. Consult the governing electrical code and confer with appropriate customer administrative personnel to determine the areas requiring this type of grounding system.
10. The maximum point to point distances illustrated on this drawing must not be exceeded.
11. Physical connection of primary power to GE equipment is to be made by customers electrical contractor with the supervision of a GE representative. The GE representative would be required to identify the physical connection location, and insure proper handling of GE equipment.
12. GEHC conducts power audits to verify quality of power being delivered to the system. The customer's electrical contractor is required to be available to support this activity.

- All junction boxes, conduit, duct, duct dividers, switches, circuit breakers, cable tray, etc., are to be supplied and installed by customers electrical contractor.
- Conduit and duct runs shall have sweep radius bends
- Conduits and duct above ceiling or below finished floor must be installed as near to ceiling or floor as possible to reduce run length.
- Ceiling mounted junction boxes illustrated on this plan must be installed flush with finished ceiling.
- All ductwork must meet the following requirements:
 1. Ductwork shall be metal with dividers and have removable, accessible covers.
 2. Ductwork shall be certified/rated for electrical power purposes.
 3. Ductwork shall be electrically and mechanically bonded together in an approved manner.
 4. PVC as a substitute must be used in accordance with all local and national codes.
- All openings in raceway and access flooring are to be cut out and finished off with grommet material by the customers contractor.
- General contractor to insert pull cords for all cable run conduits between the equipment room and the operators control room.
- 10 foot pigtailed at all junction points.
- Grounding is critical to equipment function and patient safety. Site must conform to wiring specifications shown on this plan.

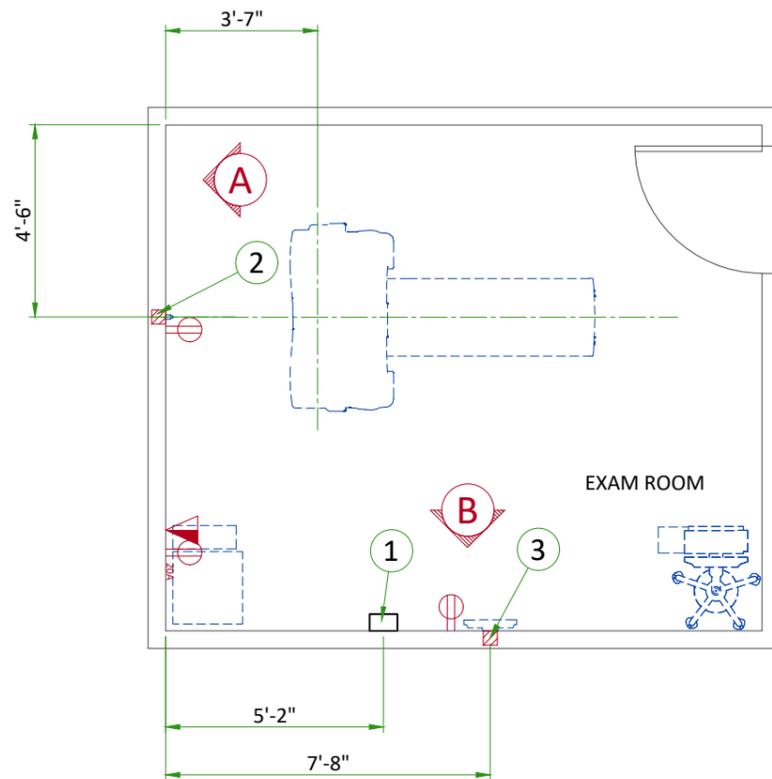

| Item | Electrical Layout Item List |
|------|---|
| 1 | 20 Amp fused safety switch or circuit breaker |
| 2 | Single gang box & cover plate (Patient Positioning Camera) |
| 3 | Single gang box & cover plate (Patient Positioning Monitor) |



| ITEM | QTY | Electrical Outlet Legend |
|--|-----|--|
| Customer/contractor supplied and installed items unless otherwise specified. Height above floor determined by local codes unless otherwise specified. | | |
| | | Duplex hospital grade, dedicated wall outlet 120-v, single phase power |
| | | Network outlet |
| | | 20 amp Duplex hospital grade receptacle, powered from system main disconnect |

| Additional Conduit Runs (Contractor Supplied and Installed) | | | | | |
|--|-------------------------------|-----|----------|----------|--|
| From (Bubble # / Item) | To (Bubble # / Item) | Qty | Size | | |
| | | | In. | mm | |
| 1 Phase Power | 1 Main Disconnect Panel | 1 | As req'd | As req'd | |
| 2 Patient Positioning Camera | 3 Patient Positioning Monitor | 1 | 1 | 25 | |

INTERCONNECTIONS



A

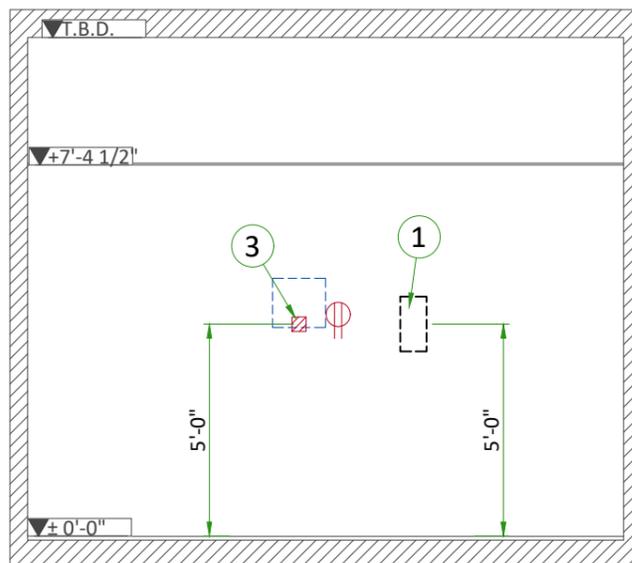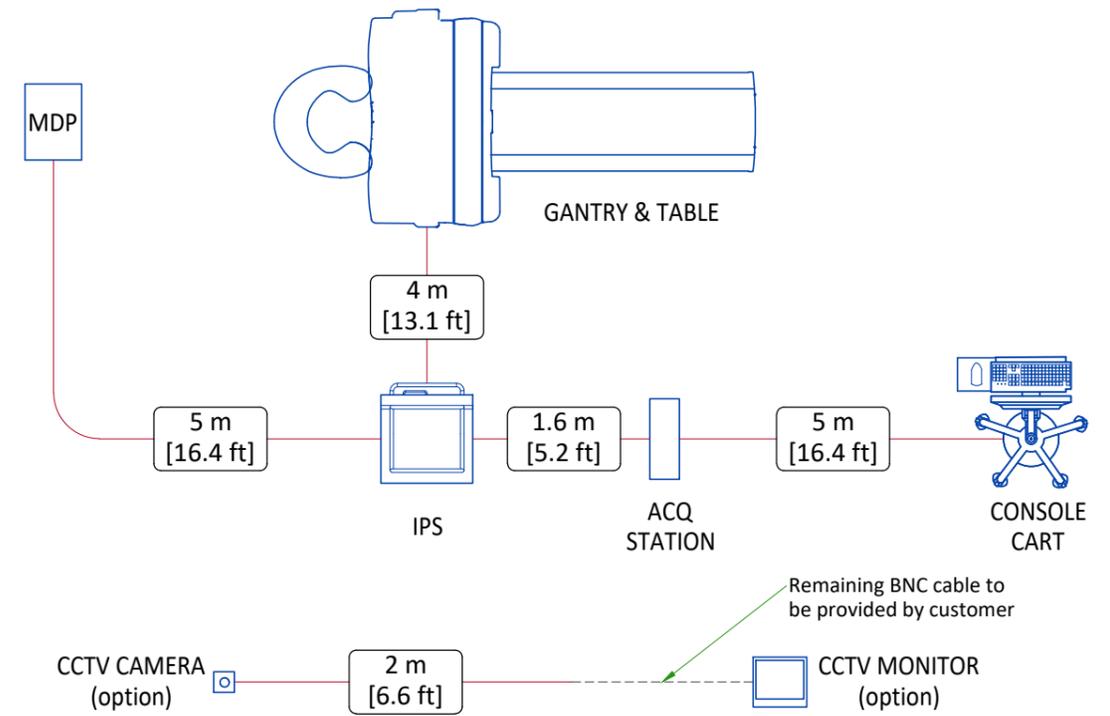

B

POWER REQUIREMENTS

| | |
|---------------|--|
| POWER SUPPLY | SINGLE PHASE+N+G 115/230 V +10% -5% |
| FREQUENCIES | 50/60 Hz ± 1 Hz |
| POWER RATINGS | 1.9 kVA |

- Line supply should come into a Main Disconnect Panel (MDP) containing the protective units and controls. The section of the supply cable should be calculated in accordance with its length and the maximum permissible voltage drops.
- There must be discrimination between supply cable protective material at the beginning of the installation (main low-voltage transformer side) and the protective devices in the MDP.

SUPPLY CHARACTERISTICS

- Power input must be separate from any others which may generate transients (elevators, air conditioning, radiology rooms equipped with high speed film changers ...)
- All equipment (lighting, power outlets, etc...) installed with GE system components must be powered separately.
- Transients must be less than 1200 V peak (on a 230 V line). A record of power input disturbances over a continuous one-week period (prior to delivery) enables determination of the frequency and degree of these disturbances and can be used to ascertain the need to provide line conditioning equipment.

GROUND SYSTEM

- Equipotential: The equipotential link will be by means of an equipotential bar. This equipotential bar should be connected to the protective earth conductors in the ducts of the non GE cableways and to additional equipotential connections linking up all the conducting units in the rooms where GE system units are located.

CABLES

- Power and cable installation must comply with the distribution diagram below.
- All cables must be isolated and flexible, cable color codes must comply with standards for electrical installation.
- The cables from signaling and remote control (Y, SEO, L ...) will go to MDP with a pigtail length of 1.5 m, and will be connected during installation. Each conductor will be identified and isolated (screw connector).


CABLEWAYS

The general rules for laying cableways should meet the conditions laid down in current standards and regulations, with regard to :

- Protecting cables against water (cableways should be waterproof)
- Protecting cables against abnormal temperatures (proximity to heating pipes or ducts)
- Protecting cables against temperature shocks
- Replacing cables (cableways should be large enough for cables to be replaced)
- Metal cableways should be grounded

| FEEDER TABLE | | | | | | | |
|--|-------------------------------------|------------|----------|----------|----------|--|--|
| MIN. FEEDER WIRE SIZE, AWG OR MCM (mm²)/VAC | MINIMUM FEEDER WIRE LENGTH - ft (m) | | | | | | |
| | 50 (15) | 100 (30.5) | 150 (46) | 200 (61) | 250 (76) | | |
| 115 VAC | 10 (6) | 8 (8) | 6 (17) | 4 (26) | 3 (34) | | |
| 230 VAC | 12 (3) | 12 (3) | 12 (3) | 10 (6) | 10 (6) | | |
| GENERAL NOTES | | | | | | | |
| In all cases qualified personnel must verify that the feeder (at the point of take-off) and the run to the GE system meet all the requirements stated in the PIM | | | | | | | |
| Grounding conductor will run from the equipment back to the power source/main grounding point and always travel in the same conduit with the feeders | | | | | | | |

POWER DISTRIBUTION

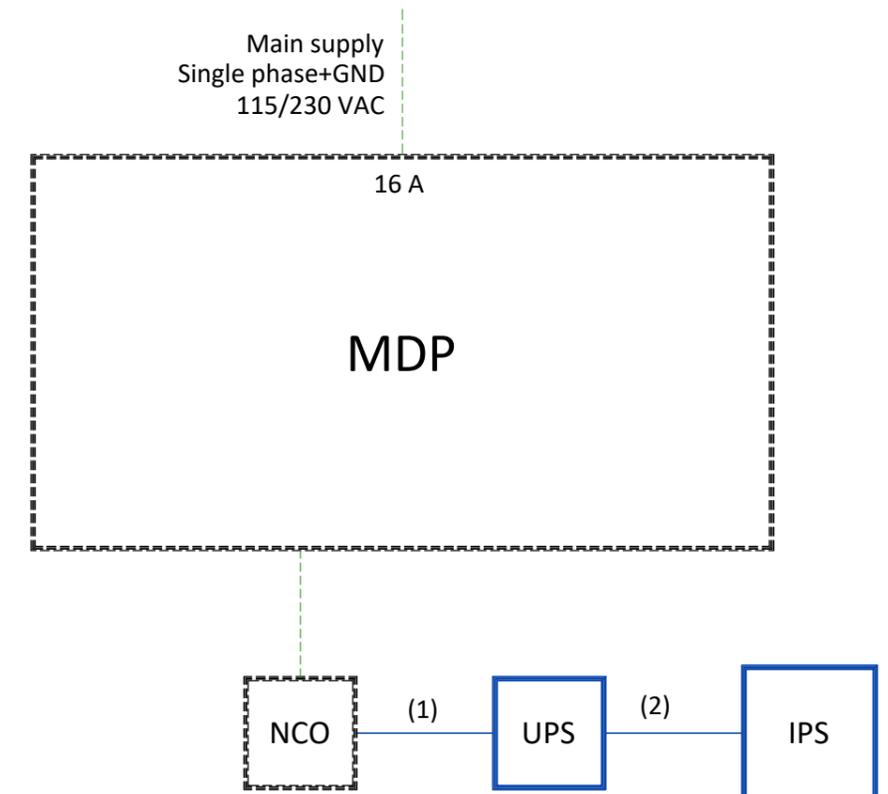

IPS Integrated Power Supply
 MDP Main Disconnect Panel
 NCO Camera Outlet
 UPS UPS Cabinet

Notes :

- Cable with a usable length of 1.52m [5 ft] is delivered with the system.
- Cable with a usable length of 5m [16.4 ft] is delivered with the system.

| | |
|--|--------------------------------|
| - - - - - | Cable SUPPLIED BY CUSTOMER |
| — | Cable SUPPLIED BY GE |
| | Equipment SUPPLIED BY CUSTOMER |
| | Equipment SUPPLIED BY GE |